



33

IGP Powder Coatings

TDS IGP-DURA®mix 3302A-T0|240424|v1.2

Le presenti informazioni di natura tecnica relative all'utilizzo sono fornite sulla base delle conoscenze attuali. Tuttavia devono essere considerate come indicazioni non vincolanti che non esonerano dall'effettuazione di controlli autonomi. Utilizzo, destinazione e applicazione di prodotti hanno luogo senza possibilità di controllo da parte nostra e, pertanto, soggiacciono esclusivamente alla vostra responsabilità.

Prima dell'applicazione consultare la scheda di sicurezza. Scheda di sicurezza specifica per l'articolo e misure più approfondite sulla gestione del rischio alla pagina: **igp-powder.com**

IGP Powder Coatings

TDS IGP-DURA®mix 3302A-T0|240424|v1.2

Scheda tecnica

IGP-DURA®mix 3302A-T0

Very matte thin-film powder coating with smooth finish in a wide range of colors.



Proprietà

- opaco
- superficie liscia
- Tinte unite
- Indoor quality
- Basso spessore



Proprietà delle polveri

Granulometria:

Corpi solidi:

Densità:

Stoccaggio:

< 100 µm

> 99 %

1.3 kg/l-1.6 kg/l

min. 24 months at ≤ 25 °C

in an unopened original container

Color tones:

On request



Applicazione

Pretrattamento

The substrate must be free from oil, grease and oxidation products. The pretreatment depends on the type of substrate and the corrosion protection to be achieved. We recommend the following pretreatments:

Alluminio

- Chromating according to DIN EN 12487
- Pre-anodization
- Chrome-free pretreatment according to GSB International and QUALICOAT specifications

Acciaio

- Zinc phosphating
- Iron phosphating

Acciaio zincato

- Zinc phosphating
- Chrome (III) passivation
- Chromating according to DIN EN 12487

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. The minimum requirement for aluminium substrates / galvanised steel components is to carry out a boiling water test with a subsequent cross-cut adhesion and tape test. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI 100).

Impianti di verniciatura

All commercially available electrostatic systems, both corona and tribo charge systems.

For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.


Spessore del film consigliato

50 µm - 60 µm

A homogeneous coating result with textured coatings or article-and color specific differences in hiding power may require higher coating thicknesses. The corresponding processing guidelines must be observed.

For a pre-calculation of the required powder coating quantity, the necessary coating thickness must be determined for each article.

Condizioni di cottura

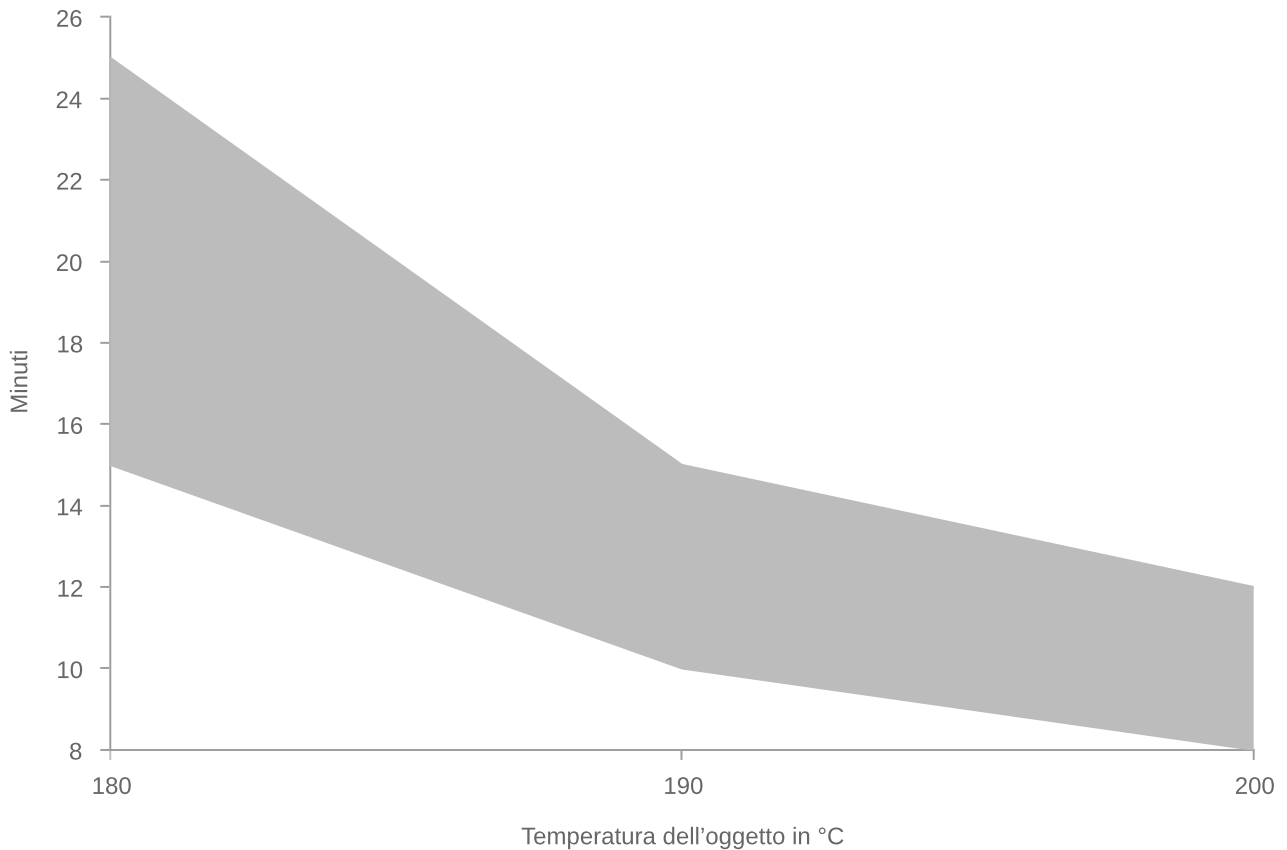

T_{oggetto}	t_{min}	t_{max}
180 °C	15 minutes	25 minutes
190 °C	10 minutes	15 minutes
200 °C	8 minutes	12 minutes

Per accertare le condizioni di cottura migliori si consiglia, in ogni caso, di effettuare prove pratiche con il rispettivo oggetto e forno di polimerizzazione.

Recupero

Small portions of recycled powder can be added, automatically if possible, to the fresh powder.

Important: Keep overspray to an absolute minimum.



Caratteristiche del film

Testato per

Substrati:

Steel, 0.5mm

Tinte testate:

RAL 9010

Spessore:

50 µm - 60 µm

Temperatura dell'oggetto:
190 °C, 10 min.
Struttura superficiale
Brillantezza
17-23 R'/60°
DIN EN ISO 2813 2015-02
Prove meccaniche
Cross-cut adhesion test
Gt 0
DIN EN ISO 2409 2020-12
Mandrel bending test
≤ 5 mm
DIN EN ISO 1519 2011
Impact test
≥ 10 inchp.
ASTM D 2794 1993
Erichsen cupping
≥ 5 mm
DIN EN ISO 1520 2007-11
Buchholz hardness
≥ 80
DIN EN ISO 2815 2003-10
Verifiche della resistenza a corrosione
Condensation water test, 500-1000h*
No infiltration, no blisters. *depending on pretreatment
DIN EN ISO 6270-2 2018-04
Natural salt spray test, 500-1000h*
No infiltration, no blisters.
*depending on pretreatment.
DIN EN ISO 9227 2017-07
Prove chimiche
Acids and alkalis
Good resistance to many dilute acids and alkalis.
Organic solvents
Limited resistance to organic solvents.



Altre informazioni

Imballaggio

20 kg cardboard box with inserted antistatic PE liner

500 kg cardboard container with 25 antistatic PE-liners each 20kg

Protezione delle superfici verniciate

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

Pulizia

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01.