



Scheda tecnica

## IGP-DURA®mix 334MA-C0

Matte powder coating with a variable fine texture and electrostatically discharging properties (ESD).



### Proprietà

- extra opaco
- raggrinzato var.
- Tinte unite
- Indoor quality
- Conduttivo



### Proprietà delle polveri

Granulometria:	< 100 µm
Corpi solidi:	> 99 %
Densità:	1.3 kg/l-1.6 kg/l
Stoccaggio:	min. 24 months a ≤ 25 °C in an unopened original container
Color tones:	On request



### Applicazione

#### Pretrattamento

The substrate must be free from oil, grease and oxidation products. The pretreatment depends on the type of substrate and the corrosion protection to be achieved. We recommend the following pretreatments:

#### Alluminio

- Chromating according to DIN EN 12487
- Pre-anodization
- Chrome-free pretreatment according to GSB International and QUALICOAT specifications

#### Acciaio

- Zinc phosphating
- Iron phosphating

#### Acciaio zincato

- Zinc phosphating
- Chrome (III) passivation
- Chromating according to DIN EN 12487

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. The minimum requirement for aluminium substrates / galvanised steel components is to carry out a boiling water test with a subsequent cross-cut adhesion and tape test. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI 100).

### Impianti di verniciatura

All commercially available electrostatic systems, both corona and tribo charge systems.


For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.

### Spessore del film consigliato

60 µm - 80 µm

With higher layers, the powder coating becomes insulating.

### Condizioni di cottura

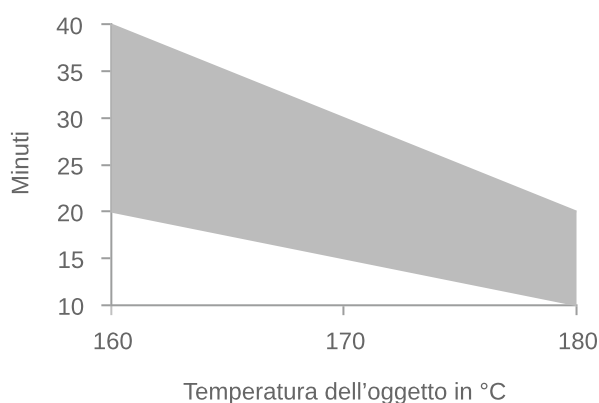

<b>T<sub>oggetto</sub></b>	<b>t<sub>min</sub></b>	<b>t<sub>max</sub></b>
160 °C	20 minutes	40 minutes
<b>170 °C</b>	<b>15 minutes</b>	<b>30 minutes</b>
180 °C	10 minutes	20 minutes

Per accertare le condizioni di cottura migliori si consiglia, in ogni caso, di effettuare prove pratiche con il rispettivo oggetto e forno di polimerizzazione.

### Recupero

Small portions of recycled powder can be added, automatically if possible, to the fresh powder. Important: Keep overspray to an absolute minimum. Processing instruction VR214 must be observed.



## Caratteristiche del film

### Testato per

Substrati: Steel, 0.5mm  
 Spessore: 60 µm - 80 µm  
 Temperatura dell'oggetto: 170 °C, 15 min.

### Prove meccaniche

Cross-cut adhesion test	Gt 0	DIN EN ISO 2409 2020-12
Mandrel bending test	≤ 5 mm	DIN EN ISO 1519 2011
Impact test	≥ 10 inchnp.	ASTM D 2794 1993
Erichsen cupping	≥ 3 mm	DIN EN ISO 1520 2007-11
Buchholz hardness	≥ 80	DIN EN ISO 2815 2003-10

## Verifiche della resistenza a corrosione

---

Condensation water test, 500-1000h*	No infiltration, no blisters. *depending on pretreatment	DIN EN ISO 6270-2 2018-04
Natural salt spray test, 500-1000h*	No infiltration, no blisters. *depending on pretreatment.	DIN EN ISO 9227 2017-07

## Prove chimiche

---

Acids and alkalis	Good resistance to many dilute acids and alkalis.
Organic solvents	Limited resistance to organic solvents.

## Additional properties

---

Long term heat resistance	> 100°C allmähliche Vergilbung	
electrostatic discharge resistance	TI 101	DIN EN 61340-2-3 2017-05



## Altre informazioni

### Imballaggio

20 kg cardboard box with inserted antistatic PE liner  
500 kg cardboard container with 25 antistatic PE-liners each 20kg

### Protezione delle superfici verniciate

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

### Pulizia

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01.

### Rimozione e smaltimento della pittura

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.

Le presenti informazioni di natura tecnica relative all'utilizzo sono fornite sulla base delle conoscenze attuali. Tuttavia devono essere considerate come indicazioni non vincolanti che non esonerano dall'effettuazione di controlli autonomi. Utilizzo, destinazione e applicazione di prodotti hanno luogo senza possibilità di controllo da parte nostra e, pertanto, soggiacciono esclusivamente alla vostra responsabilità.

Prima dell'applicazione consultare la scheda di sicurezza. Scheda di sicurezza specifica per l'articolo e misure più approfondite sulla gestione del rischio alla pagina: **[igp-powder.com](http://igp-powder.com)**